


METER LOOP INSTALLATION GUIDE FOR: GABLE MOUNT 100 AMP SERVICE, 120/240 VAC



ALL REQUIREMENTS OF THE CURRENT EDITION OF THE NAT'L ELECTRIC CODE (NEC) OR OF THE LOCAL CODES SHOULD BE FOLLOWED WHEN NOT ADDRESSED IN THIS GUIDE.

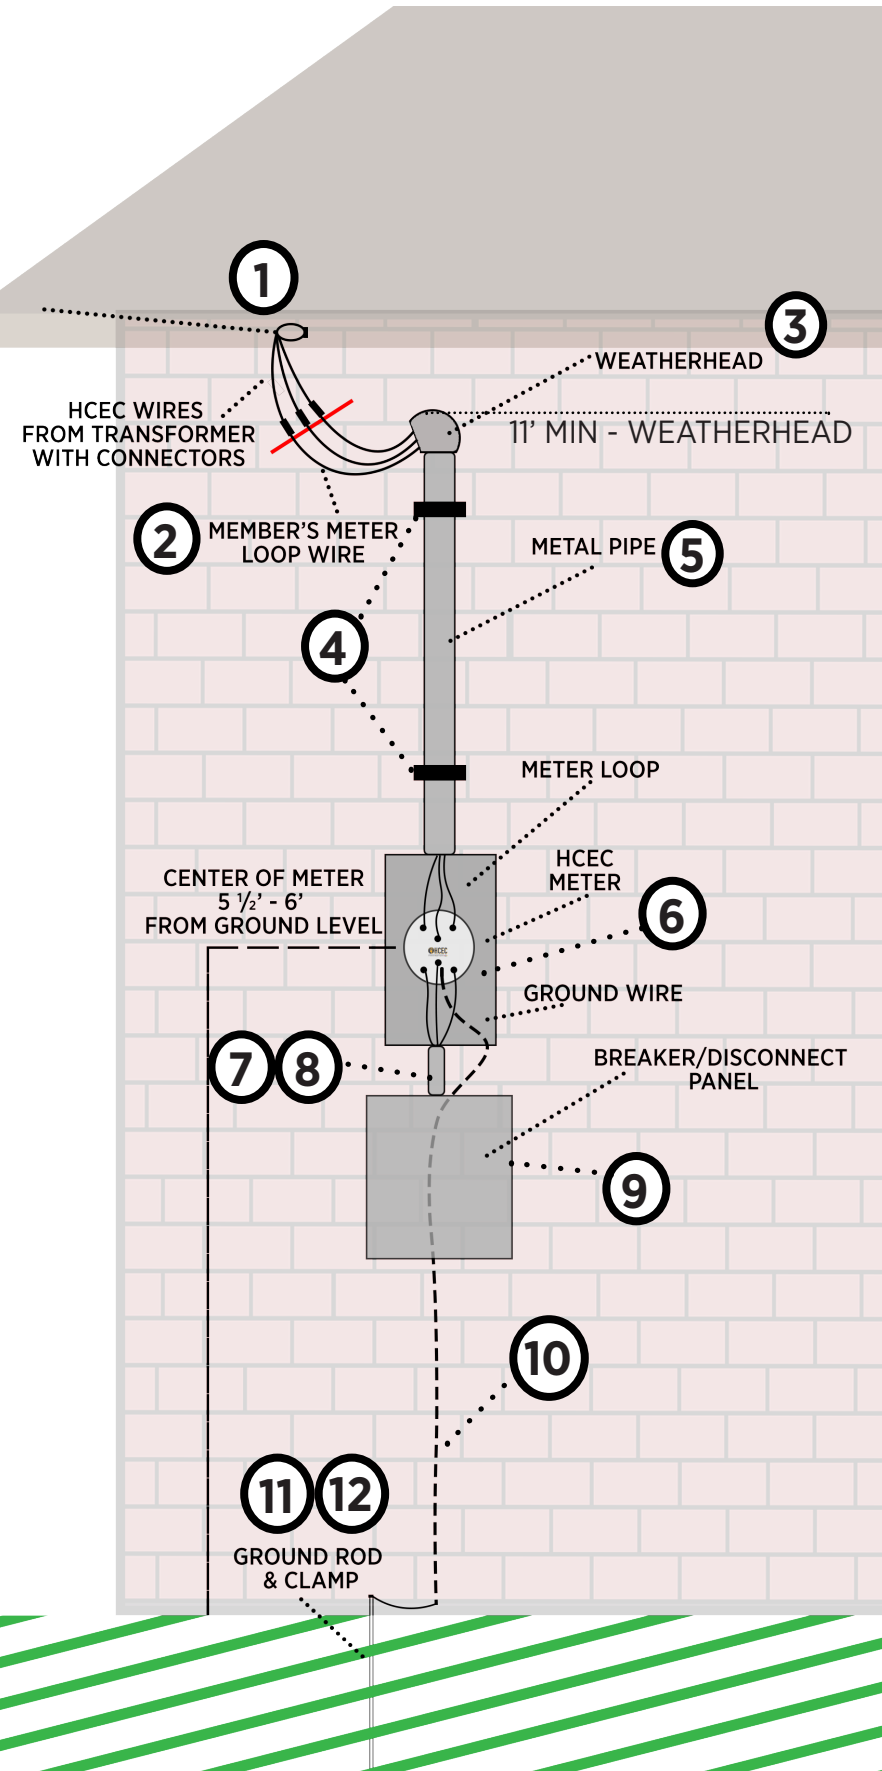

Bill of Material:

ITEM	QTY	DESCRIPTION
1	1	Eyebolt for metal bldg. only. Otherwise not required.
2	As Req'd	#2 stranded copper cable with 90 C Insulation rating Type RHH, THHN, THHW, or XHHW. See note below.
3	1	1 1/4" Weatherhead
4	As Req'd	1 1/4" conduit straps with screws (Nails NOT acceptable).
5	As Req'd	1 1/4" rigid metal or E.M.T. conduit with weather tight connectors.
6	1	Meter Socket (Furnished by HCEC)
7	1	1 1/4" nipple.
8	2	1 1/4" conduit locknuts.
9	1	2-Pole 100 AMP Weatherproof enclosure with 1 1/2" Hub if outside; if the enclosure is used inside, the distance to the meter should be kept at the MIN. according to the NEC. (no more than a 6 circuit breaker panel is allowed without a main breaker)
10	As Req'd	Min. 6 solid soft drawn copper wire.
11	1	Ground clamp approved for the type of ground rod used.
12	1	8' by 1/2" copper coated ground rod is preferred or 8' by 5/8" galvanized ground rod is acceptable. The ground rod must be driven to ground level.

NOTE: The conductor size shall be as noted above or copper in accordance with the NEC, whichever is larger.

Leave a minimum of 18" conductor extending from the weatherhead.

1 1/4" is the minimum size req'd - Optional: 1 1/2" or 2"